


SERVING THE BARN TRIM INDUSTRY

MiraTEC® Treated Exterior Composite Barn Trim is created using the patented TEC™ manufacturing process which bonds natural wood fibers with phenolic resins and zinc borate. The result is a wood composite trim so resistant to moisture, rot and termites that it's backed by an industry-best 50-year limited warranty.

TYPICAL BARN TRIM USE

- 1 Door trim
- 4 Window trim
- 7 Rake board or shingle mold
- 2 Frieze board
- 5 Shutter
- 6 Corner board
- 3 Fascia

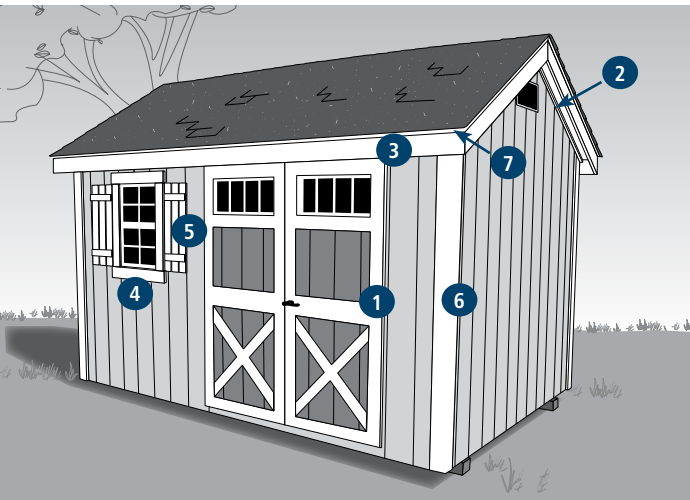

SIZE MATTERS

5/8" ACTUAL THICKNESS

Compare to 440 Series and other scant 3/4" products

2" MIRATEC BATTEN

SIZE	16' PIECES			
	NOMINAL	ACTUAL	BUNDLE	UNIT
2" x 192"	2"	2"	12	336
3" x 192"	2 3/4"	2 3/4"	8	320
4" x 192"	3 1/2"	3 1/2"	8	240
5" x 192"	4 1/2"	4 1/2"	8	200
6" x 192"	5 1/2"	5 1/2"	4	160
8" x 192"	7 1/4"	7 1/4"	4	120
10" x 192"	9 1/4"	9 1/4"	4	100
12" x 192"	11 1/4"	11 1/4"	4	80
16" x 192"	15 1/2"	15 1/2"	2	60



1.800.255.0785
miratecextira.com

MIRATEC®
by JELD-WEN



PERFORMANCE TRIM FOR THE SHED INDUSTRY



© 2019 JELD-WEN, Inc. Trademarks shown are owned by JELD-WEN, Inc. or licensed by third parties. All rights reserved. 1501B 1/19

5/8"




5/8"



TIME TESTED AND CRAFTED TO ENDURE

Unlike other materials used for trim these days, MiraTEC® is the one product actually conceived and engineered to do the job. Moisture, rot, termites, checking, splitting and cracking are all challenges it boldly takes head-on and crushes. As the first wood composite trim to earn an evaluation report (ESR-3043) from ICC-ES and 14015-L from the CCMC, MiraTEC simply performs to a standard other composite trim products cannot. Not by chance, but by design.

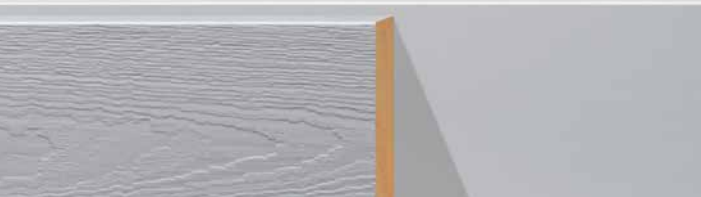

NO OTHER TRIM PERFORMS LIKE MIRATEC

- Resists moisture, rot and termites.
- Reversible with a woodgrain texture on one side and a smooth surface on the other.
- Handles like wood; easy to machine, cut and nail.
- Won't check, split or crack.
- TEC™ patented manufacturing process makes MiraTEC a solid board that has uniform properties throughout for consistent performance in every piece.
- Primed 4 sides with an ultra-low VOC, primer containing a mildewcide.
- 50-year limited warranty.



CCMC 14015-L

BUILDING CODE LISTED


U.S.: ESR-3043 from the ICC-ES and FL Building Code 22271

Canada: 14015-L from the CCMC

IN HEAD-TO-HEAD COMPETITION, IT'S NO CONTEST


- **HAMMERS PVC** - MiraTEC is kind to the environment, and looks great no matter what color it is painted, at half the price.
- **SLAMS PRIMED WOOD** - MiraTEC outlasts and outperforms wood, with a 50-year limited warranty to prove it.
- **PULVERIZES HARDBOARD/FIBER AND OSB** - MiraTEC trim performs up to 9 times better in Weatherability Testing, which evaluates a product's ability to withstand exposure to the exterior environment over time.

WEATHERABILITY TEST PROVES MIRATEC PERFORMS BETTER THAN HARDBOARD/FIBER AND OSB TRIM³

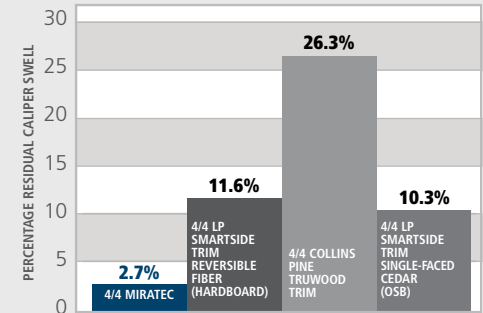

- **CRUSHES FIBER CEMENT** - MiraTEC trim is highly resistant to moisture. Independent tests show fiber cement absorbs over 5 times more water than MiraTEC.

MIRATEC ABSORBS LESS WATER THAN FIBER CEMENT TRIM¹

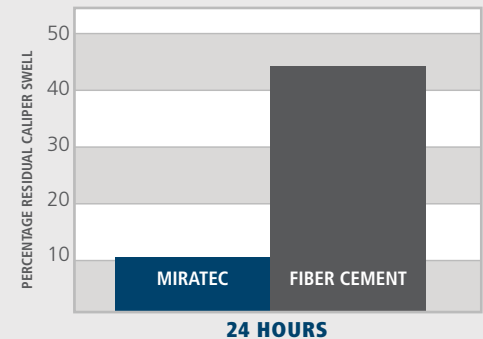

¹TEST PERFORMED BY STORK TWIN CITY TESTING CORPORATION
²TEST PERFORMED BY FORINTEK.
³SOURCE: TEST PERFORMED BY FPINNOVATIONS.
 FOR DETAILS OF EITHER TEST EMAIL MIRATEC-TESTDETAILS@JELDWEN.COM