

MIRATEC OPENS THE DOOR TO SAVINGS

SAVE TIME AND MATERIAL BY USING MIRATEC 7' AND 9' TRIM LENGTHS FOR ALL OF YOUR EXTERIOR MILLWORK NEEDS

Minimize job waste and labor with standard door opening trim lengths for all of your exterior millwork needs. Choose from authentic woodgrain, the smooth side of MiraTEC reversible trim, or MiraTEC Smooth Select to complement your door finish.

NO OTHER TRIM PERFORMS LIKE MIRATEC

- Available in 16' standard lengths and in 7' and 9' lengths via special order (approximately 3 week lead time from manufacturing site, contact your supplier for details).
- Resists moisture, rot and termites.
- Reversible with a woodgrain texture on one side and a smooth surface on the other.
- Handles like wood; easy to machine, cut and nail.
- Won't check, split or crack.
- TEC[™] patented manufacturing process makes MiraTEC a solid board that has uniform properties throughout for consistent performance in every piece.
- Primed 4 sides with an ultra-low VOC primer containing a mildewcide.
- 50-year limited warranty.



7' & 9' LENGTH SPECIAL ORDER*										
THICKNESS	SIZE	BUNDLE (pcs)	UNIT (pcs)							
5/8" Actual	4″ x 84″	8	240							
5/8" Actual	4″ x 108″	8	240							
5/4" (Nominal) 1" Actual	4″ x 84″	8	240							
5/4" (Nominal) 1" Actual	4" x 108"	8	240							

*4 unit minimum order and special order lead time (details available when you place your order)







ANYONE CAN TALK PERFORMANCE; MIRATEC PROVES IT




BUILDING CODE LISTED U.S.: ESR-3043 from the ICC-ES and FL Building Code 22271 Canada: 14015-L from the CCMC

- Moisture resistant: As measured by ASTM D1037 for Water Absorption and Thickness Swelling.
 - **Rot resistant:** Tested per AWPA E16 Field Test for Evaluation of Wood Preservatives to be Used Out of Ground Contact: Horizontal Lap-Joint Method.
 - **Termite resistant:** Tested per AWPA E7 Standard Method of Evaluating Wood Preservatives by Field Tests with Stakes.



TYPICAL INSTALLATION LOCATIONS



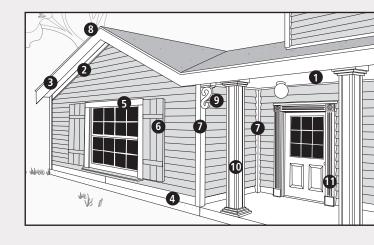

STANDARD PRODUCT SIZING

	5/8 " ACT	5/8" ACTUAL THICKNESS				3/4" ACTUAL THICKNESS (4/4 Nominal)			1" ACTUAL THICKNESS (5/4 Nominal)				1-1/4" ACTUAL THICKNESS			
	Compare to	440 Series and	d other scant 3/4	" products					Compare	to 540 Series a	nd other similar j	products	(6/4 Non	ninal) Smo	ooth Both S	Sides
	SIZE		16' PIECES		SIZE		16' PIECES		SIZE		16' PIECES		SIZE		16' PIECES	
	NOMINAL	ACTUAL	BUNDLE	UNIT	NOMINAL	ACTUAL	BUNDLE	UNIT	NOMINAL	ACTUAL	BUNDLE	UNIT	NOMINAL	ACTUAL	BUNDLE	UNIT
2" MIRATEC BATTEN	2" x 192"	2"	12	336	2" x 192"	2"	12	336	2" x 192"	2"	9	252	4" x 192"		4	
	3" x 192"	2 ¾"	8	320	3" x 192"	2 ¾"	8	320	3" x 192"	2 ¾"	6	240	6" x 192"		3	96
		3 1⁄2"	8	240	4" x 192"	3 1⁄2"	8	240	4" x 192"	3 1⁄2 "	6	180	8" x 192"	7 ¼"	3	72
			8		5" x 192"			200	5" x 192"		6	150	10" x 192"		3	
	6" x 192"		4	160	6" x 192"		4	160	6" x 192"		3	120	12" x 192"	11 ¼"	3	48
	8" x 192"	7 ¼"	4	120	8" x 192"	7 ¼"	4	120	8" x 192"	7 ¼"	3	90				
			4		10" x 192"		4	100	10" x 192"		3	75				
	12" x 192"		4	80	12" x 192"		4	80	12" x 192"		3	60				
	16" x 192"	15 1⁄2"	2	60	16" x 192"	15 ½"	2	60	16" x 192"	15 ½"	2	42				

© 2019 JELD-WEN, Inc. Trademarks shown are owned by JELD-WEN, Inc. or licensed by third parties. All rights reserved. 1452 8/19

1.800.255.0785 | miratecextira.com



